



## Audurra One-way Spraysuit

Size	Article-no.	Packaging
S	D15352633	1 piece
M	D15352634	1 piece
L	D15352635	1 piece
XL	D15352636	1 piece
XXL	D15352637	1 piece
XXXL	D15352638	1 piece




### Features:

- Elastic belly-band
- Comfortable two-way zipper
- Big-sized elastic knitted arm band
- Functional elastic band at the legs
- Antistatic
- Typ 5: EN ISO 13982-1 Protection against damaging dust
- Typ 6: EM 13034 Limited protection against liquid chemicals
- Silicon-free

## Description:

Due to its breathable texture and its red back, which is permeable to air, this overall offers the best wearing comfort combined with superior protection against hazardous dusts (Type 5) and certain light liquid splashes (Type 6).

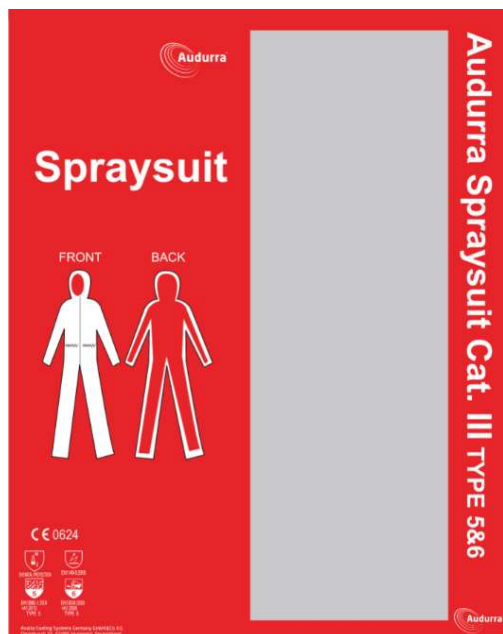

EN1149-5:2008



EN13982-1:2004  
+A1:2010  
TYPE 5




EN13034:2005  
+A1:2009  
TYPE 6

CE 0624

<b>Performance Profile of Audurra Spraysuit</b>					
Physical data	Test method	Result		Class	
		Front	Back	Front	Back
Abrasion resistance	EN530 method 2	500<cycles<100		3/6	3/6
Seam strength	ISO 13935-2	55.8N-111N-73N-107N-120N		2/6	
Puncture resistance	EN863	11.5N	7N	2/6	1/6
Ignition Resistance	EN 13274-4 method 3	Pass			
Flex cracking	ISO 7854 method B	>100,000 cycles		6/6	6/6
Tensile Strength	ISO 13934-1	112N weft	67N weft	1/6	2/6
		53N warp	89N warp		
Trapezoidal Tear	ISO9073-4	68.8N weft	32.3N weft	2/6	2/6
		27.6N warp	32.2N warp		
Reduced Spray test	EN468(EN13034/05+A1/09) Type 6	Pass			
Whole suit dust test	EN13982-2/04 Type 5	Pass			
<b>Resistance to penetration and repellency by liquid in accordance with EN 6530</b>					
		Repellency		Penetration	
		Front	Back	Front	Back
H <sub>2</sub> SO <sub>4</sub> (Sulphuric acid) 30%	EN6530	Class 3/3(95.4%)	Class 2/3(93.6%)	Class 3/3(0%)	Class 3/3(0%)
NaOH(Sodium hydroxide) 10%	EN6530	Class 3/3(97.6%)	Class 3/3(95.8%)	Class 3/3(0%)	Class 3/3(0%)
o-xylene	EN6530	Class 3/3(94.6%)	Class -/3(0.8%)	Class 3/3(0%)	Class -/3(28.8%)
Butan 1 ol	EN6530	Class 3/3(96.7%)	Class -/3(16.9%)	Class 3/3(0%)	Class -/3(26.8%)

## Size table:

Body measurement in cms in compliance with 13688:2013					
Size	Chest girth	Body Height	Size	Chest girth	Body Height
S	86-94	158-166	XL	110-118	182-190
M	94-102	166-174	XXL	118-129	190-198
L	102-110	174-182	XXXL	129-141	198-206




An appropriate size garment should be selected to allow for sufficient movement for the task.

## Typical Applications:

Specially designed for usage in the spray-booth while working with solventbased or waterbased paint (Category III, Type 5/6).

## Storage and Disposal:

- Store in dry, clean conditions in original packaging
- Store away from direct sunlight, sources of high temperature, and solvent vapors
- Store within the temperature range  $-20^{\circ}\text{C}$  to  $+25^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$  to  $+68^{\circ}\text{F}$ ) and with relative humidity below 80%
- Replace garments if damaged, heavily contaminated or in accordance with local work practice or regulations
- Handle and dispose of contaminated garments with care and in accordance with national regulations



Do not wash



Do not iron



Do not machine dry



Do not dry clean



Inflammable. This garment is expressly constructed as a protection against chemical hazards, and should not, under any circumstances, come into contact with naked flame, or be used in a combustible situation.

Product must never be altered or modified.